

## Project: Fit MKIV Supra Hood

Parts:	PART No:	QTY:
BULGE, HOOD	T76181-14900	1
GUIDE,	T76182-14010	1
PROTECTOR,	T76184-14010	1
PROT.SPOILER	T90999-91057	1
RETAINER,	T76187-14010	2
PLATE,	T76192-14010	1
SEAL,HOOD AIR	T76186-14010	1
SCREW	T93567-14512	8
NUT	T90179-06299	4
CLIP	T90467-08124	14

Link To Template: <http://img225.imageshack.us/img225/7434/scoopfixedds7.jpg>

Print in Landscape at 100%

### Recommendations:

The J-Spec requires an extra 4 of Clip T90467-08124 to hold the metal under air guide in place, which it doesn't have as standard as they are not required until you do this mod. The recommendation is to buy a full set as the clips will have hardened through age and 90% brake even using a proper tool.



First remove the front rubber strip then the plastic clips, the centre rear 2 do not get removed as they are not the same as the rest and just hook onto a lip as apposed to through a hole.



Now drill through the 4 holes circled using a drill bit smaller than the hole, so as not to fowl the edges of the hole. Try and keep an angle parallel to the hood. It is a good idea to place a blanket over the engine for the remainder of this project.




This is what you should see on the outside.



Now secure the printed template through the marked holes to the top of the hood. I used 4 screws that were to hand.



Apply masking tape around the template; lip it under the template for marking on.

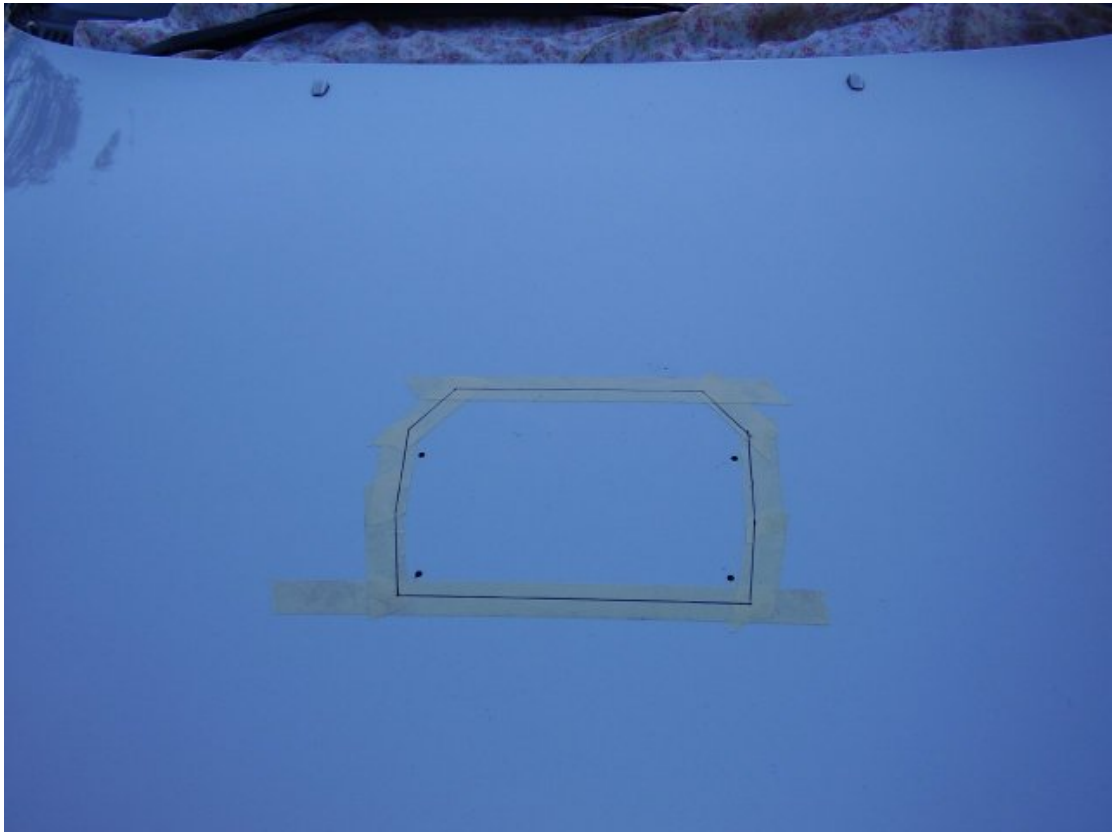

Draw around the template (on the masking tape) with a felt tip. Then remove the template and the screws.



Now using a dremel cut along the felt tip line. You can sand the edge after if you wish but not essential, just cleaning.



Attach the retaining brackets and the grill to the scoop and rest it in place. For cosmetic viewing only. ☺



Now cut the hole in the under blanket using a knife.

At this point there should be a picture showing the seal being applied to the under side of the hood, and placing on the hood, but urrrmmm... Moving swiftly on.



Now fully fit the under blanket back on the car except for the central 6 clips that have to hold the metal under air guide in place.

Now whilst holding the scoop on top of the hood; so you don't push it off, lightly fit the metal under air guide using the 4 nuts.

Now insert the clips and then tighten the 4 nuts.



That's it, job done. 😊